




- Finition : Zingué blanc
- Marquage : Ø, CE, CMU, Fabricant, Matière
- Filetage : ISO

## ANNEAU DE LEVAGE MALE DIN 580

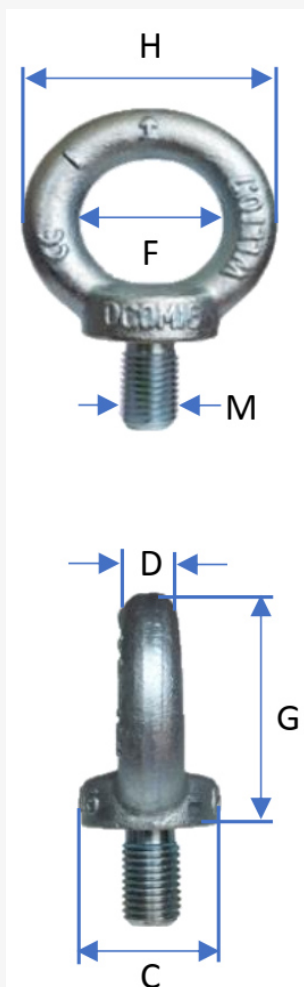

M	CMU KG		C mm	D mm	E mm	F mm	G mm	H mm	poids kg
	⊥	∧							
M6	75	55	20	8	13	20	36	36	0,06
M8	140	100	20	8	13	20	36	36	0,06
M10	230	170	25	10	17	25	45	45	0,11
M12	340	240	30	12	20,5	30	53	54	0,18
M14	490	350	35	14	27	35	62	63	0,27
M16	700	500	35	14	27	35	62	63	0,28
M18	850	600	40	16	30	40	71	72	0,44
M20	1200	860	40	16	30	40	71	72	0,45
M22	1400	1000	50	20	36	50	90	90	0,72
M24	1800	1290	50	20	36	50	90	90	0,74
M27	2100	1500	65	24	45	60	109	108	1,62
M30	3200	2300	65	24	45	60	109	108	1,66
M33	3200	2300	75	28	54	70	128	126	2,6
M36	4600	3300	75	28	54	70	128	126	2,65
M39	4600	3300	85	32	63	80	147	144	3,78
M42	6300	4500	85	32	63	80	147	144	4,03
M45	6300	4500	100	38	68	90	168	166	6,24
M48	8600	6100	100	38	68	90	168	166	6,38
M52	8600	6100	110	42	78	100	187	184	8,57
M56	11500	8200	110	42	78	100	187	184	8,8
M64	16000	11000	120	48	90	110	208	206	12,4
M72	20000	14000	150	60	100	140	260	260	23,3
M80	28000	20000	170	68	112	160	298	296	34,2
M100	40000	29000	190	75	130	180	330	330	49,1



- Coefficient de sécurité 1/5
- Acier C15E



Disponible sur stock du M8 au M30